

TaperLamp 626-C LED Guide Light System

EN
12352

tested according to British Standards

- Lamp class L2L/L4 according to EN 12352
 - With integrated cone bracket
 - Lens diameter 186 mm with reflective rim
 - Each lamp is switched on separately and can be used as individual lamp
 - Stable synchronization of the lamps by long infrared path of up to 10 m
 - Steady basic light for better orientation
 - Automatic switch-on by putting on a cone
- Examples of application (depending on country-specific regulations)
 - on traffic cones
 - at accident scenes
 - in case of vehicle breakdowns
 - for traffic guidance in front of building sites

TaperLamp 626-C LED Guide Light System	Ref. No.
TaperLamp 626-C LED FÜQ Lamp, one-sided amber with cone bracket	129 083-1

Operating time with one set of batteries


With battery Premium 800	300 hrs
With battery Premium 3000	1000 hrs
With battery Konstant 45	1500 hrs
With nickel cadmium battery 5 V, 4,5 Ah	70 hrs

Technical data

Light colour	yellow
Eff. light intensity	100 cd
Blink-/flash rate	60 fl./min.
Light source	1 Super-LED

Packaging unit

11 lamps in one carton
also available in other quantities

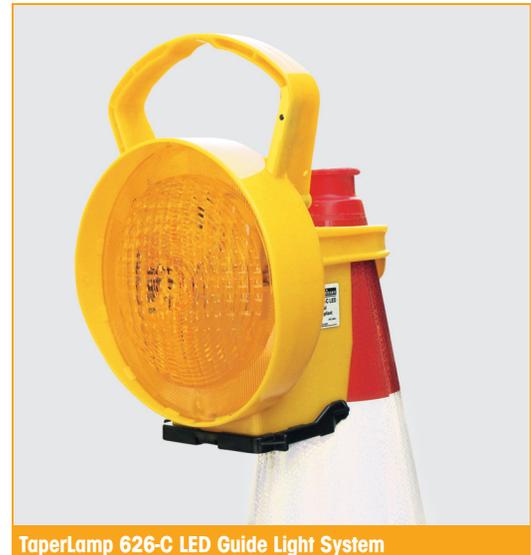

TaperLamp 626-C LED Guide Light System



Changing battery



Holder